







Manufacturer & Exporter of : Hospital Furniture & Operation Theatre Equipments





Model: AS-40I-B

Electro/Remote Operated "C-ARM" Compatible Bariatric Operating Table



Features:

- The Electro/Remote driving mechanism with INBUILT BATTERY BACK UP assures smooth and quiet movement of Table Top.
- Operating positions including Height Adjustment, Trendelenburg /reverse Trendelenburg, Lateral Tilt Both sides, Flex/Reflex and Back section can be controlled quickly and accurately with the help of Light weight corded Hand Control unit/Remote control and Power control panel fitted on column.
- The eccentrically positioned Four Section Powered Table Top is X-Ray Translucent and "C-ARM" Image Intensifier Compatible with Longitudinal sliding displacement / Sliding Table Top.
- Removable and Split Leg Plates allows vertical or horizontal positioning adjustable; Downing/vertical positioning through Pneumatic Gas pump and Split/ Horizontal Positioning through Ratchet mechanism.
- Removable and Adjustable (UP/DOWN through Ratchet) Head Section.

- Specially Designed Extension Plates with Side Rails to increase width of Table for Bariatric Surgery.
- Central Floor Locking Mechanism easily and firmly fix table in place with control of foot pedal.
- "T" Shaped Heavy and Sturdy Table Base Facilitates easy surgical team access and table stability.
- Easy swivel castors provide good mobility.
- Unique Floor Lock system provided either side of Table Base to increase weight bearing capacity & Firm Stability in Reverse Trendelenburg Position.
- Table Top Frame, Base Cover, Column Covers, Side Rails, All accessories & Clamps are made of Rust Free 304 Grade Stainless Steel for easy cleaning and Hygiene.
- High Density PU Foam Mattress with 50 mm Thickness covered with waterproof Special Rexene Easy to clean.
- Exclusive Foot Rest Plates with Extension Rail to Ensure Patient comfort, Stability and "NO Compression" at Ankle/Heel.
- Innovative Thigh Belts to Hold Patient During Long Surgery with "NO Compression".

 $\textbf{Ph.:} + 91 - 9812125829, + 91 - 9896925829 \quad \textbf{E-mail:} aggarwalsurgicalsrtk @gmail.com \quad \textbf{Website:} www.aggarwalsurgicals.com \\ \textbf{Verbite:} www.aggarwalsurgical$





Technical Specifications:

Table Top Length	:	2000 mm.
Table Width Without Side Rails	:	560 mm.
• Extension Plates Width	:	50mm each side.
Table Top Height Without Mattress	:	600 mm Minimum Height; with 150mm to 300 mm Lift Height Elevation Customizable.
Reverse Trendelenburg Position	:	40° to 50°
Trendelenburg Position	:	40° to 50°
Lateral Tilt (L/R)	:	21°/21°
Flex/Reflax	:	220°/90°
Head Rest UP/DOWN	:	90°/90°
Back Rest UP/Down	:	80°/35°
• Leg Plates (UP/Down) & Horizontal Positioning	:	$0^{\circ}/90^{\circ}$, Horizontal $0^{\circ}-140^{\circ}$
• Table Top Longitudinal Slide (TO Head , To Leg)	:	250 mm.
Maximum Weight Capacity	:	350 Kgs.

Optional: Available with Manual Override (In case of Remote/Panel/Controller Failure)through Position Select switch System foruse During NonBariatric Surgeries only. Model: AS-401-B-MO.



Standard Accessories:

• Foot Rest Plates with Extension Rails : 1 Pair.

Padded Thigh Belt with

Clamp and Height Adjustable Rod : 1 Pair.

Padded Chest Belt/strap with

Holding Bars and Clamps : 1 Pair.
Padded Lithotomy Crutches : 1 Pair.

• Padded Arm RestBoard : 1 Pair.

• Padded Shoulder Supports : 1 Pair.

• Padded Side /Lateral Supports : 1 Pair.

"L" Shaped Anaesthetic ScreenMattress Set: 1 Pc.: 1 Set.





Equipped with Adjustable Side Supports, Shoulder Supports, Patient Holding Straps Holders, Thigh Belts, Foot Supports and Width Extension Plates with Side Rails and Clamps.



Both Side Lateral Tilt Position.



Trendelenburg Position along with Longitudinal Sliding Table Top Towards Head Side.



Elevated Back Rest/ Chair Position with Split and Down Legs.



Model: AS-40I-H

Motorized /Electro/Remote Operated Operating Table For Minimal Invasive Hair Transplantation Surgical Procedures



- The Table Manufactured and Developed Exclusively for Hair Transplantation Surgical Procedures is very Stable and Versatile. Its Ergonomic design ensures both surgeon and Patient Comfort.
- The Electro/Remote driving mechanism with INBUILT BATTERY BACK UP assures smooth and quiet movement of Table Top.
- Operating positions including Height Adjustment, Trendelenburg /reverse Trendelenburg, Flex/Reflex and Back section can be controlled quickly and accurately with the help of Light weight corded Hand Control unit/Remote control.
- The Table Has a Maximum Height of 865 mm (Customizable) and Minimum height of 600 mm; Ideal for standing or sitting working position.
- Design of Head section give easy access to the patient, whilst

- allowing Leg Room and Space for the equipment pedals.
- The Adjustable cushioned head rest ensures patient comfort and restraint during operations.
- Central Floor Locking Mechanism easily and firmly fix table in place with control of foot pedal.
- Easy swivel castors provide good mobility.
- Patient comfort is essured with deep antistatic PU foam mattress/cushions which are easy to clean.
- Trendelenburg (Head low Position) and reverse Trendelenburg facility ensures safety during emergencies.
- Leg Section Detachable and Adjustable to ensure more space in Operating Room.
- Table Top Frame, Base Cover, Column Covers, Side Rails, All accessories & Clamps are made of Rust Free 304 Grade Stainless Steel for easy cleaning and Hygiene.

Standard Accessories:

Optional:

 Available with Manual Override (In case of Remote/Panel/Controller Failure)through PositionSelectswitchSystem.

Model:AS-401-H-MO

 Available with Power Control Panel Fitted on column Along with Manual Override.
 Model:AS-401-H-MO-P

Technical Specifications:

Table Top Length	: 1900 mm.
• Table Width Without Side Rails	: 560 mm.
Top Height Without Mattress	: 600 mm Minimum Height; with 150mm to 300 mm Lift Height Elevation Customizable.
 Reverse Trendelenburg Position 	: 40° to 50°
 Trendelenburg Position 	: 40° to 50°
Head Rest UP/DOWN	: 90°/90°
Back Rest UP/Down	: 80°/35°
• Leg Plate / Leg Section (UP/Down)	: 0°/90°
 Maximum Weight Capacity 	: 250 Kgs.

 $\textbf{Ph.:} + 91 - 9812125829, + 91 - 9896925829 \quad \textbf{E-mail:} aggarwalsurgicalsrtk @gmail.com \quad \textbf{Website:} www.aggarwalsurgicals.com \\ \textbf{Verbite:} www.aggarwalsurgical$



Model: AS-40I-A

Electro/Remote Operated "C-ARM" Compatible Operating Table With Sliding Tabletop, Mechanical/Manual Override & Dolumn Panel.



- The Electro/Remote driving mechanism with INBUILT BATTERY BACK UP assures smooth and quiet movement of Table Top.
- Operating positions including Height Adjustment, Trendelenburg / reverse Trendelenburg, Lateral Tilt Both sides, Flex/Reflex and Back section can be controlled quickly & accurately with the help of Light weight corded Hand Control unit/Remote control and Power control panel fitted on column.
- Mechanical/Manual Override (In case of Remote /Panel/controller Failure) through Position Select Switch system.
- The eccentrically positioned Four Section Powered Table Top is X-Ray Translucent and "C-ARM" Image Intensifier Compatible with 250 mm of Longitudinal Sliding Displacement and Streamlined Radiolucent Tabletop Provide easy "C-Arm" access & complete Maximum Patient's full Body Image Amplification coverage without moving the patient.
- Removable and Split Leg Plates allows vertical or horizontal positioning adjustable; Downing/vertical positioning through

Pneumatic Gas pump & Split/ Horizontal Positioning through Ratchet mechanism.

- Removable and Adjustable (UP/DOWN through Ratchet)Head Section.
- Interchangeable Head & Dections.
- Central Floor Locking Mechanism easily & firmly fix table in place with control of foot pedal.
- "T" Shaped Heavy & Sturdy Table Base Facilitates easy surgical team access & table stability.
- Easy swivel castors provide good mobility.
- Unique Floor Lock system provided either side of Table Base to increase weight bearing capacity Firm Stability.
- Table Top Frame, Base Cover, Column Covers, Side Rails, All accessories & Clamps are made of Rust Free 304 Grade Stainless Steel for easy cleaning and Hygiene.
- High Density PU Foam Mattress with 50 mm Thickness covered with waterproof Special Rexene Easy to clean.



Model : A5-40I-0

Motorized /Electro/Remote Operated Operating Table For Ophthalmic Surgical Procedures



- The Table Manufactured and Developed Exclusively for the Ophthalmic Surgeon is very Stable and Versatile. Its Ergonomic design ensures both surgeon and Patient Comfort.
- The Table Has a Maximum Height of 865 mm and Minimum height of 610 mm; Ideal for standing or sitting working position.
- Design of Head section give easy access to the patient, whilst allowing Leg Room and Space for the equipment pedals.
- The Adjustable cushioned head rest ensures patient comfort and restraint during operations.
- Patient comfort is essured with deep antistatic PU foam mattress/cushions which are easy to clean and wide enough to allow patients to lie with their arms by their sides without the need for additional armrests.
- The adjustable wrist support for surgeon provides comfort and stability while operating.
- Trendelenburg (Head low Position) and reverse Trendelenburg facility ensures safety during emergencies.
- Leg Section Detachable and Adjustable to ensure more space in Operating Room.

Technical Specifications:

The second section of the sect		
Total Length	;	1900 mm/ Customizable.
Total Width without Side Rails	:	610 mm/Customizable.
Minimum Height without Mattress	;	610 mm / Customizable (with 250 mm elevation).
Maximum Height without Mattress	:	865 mm/customizable.
Base Size	:	1016 mm Length X 535 mm Width.
Trendelenburg Position (Head Low)	:	0° to 40°
 Reverse Tendelenburg Position (Head UP) 	:	0° to 40°
Leg Section Adjustment UP/Downside	:	0° to 90°
Current	:	220 V AC-50HZ.
Weight Bearing Capacity	:	250 Kgs.

Ph.: +91-9812125829, +91-9896925829 E-mail: aggarwalsurgicalsrtk@gmail.com Website: www.aggarwalsurgicals.com




Standard Accessories:

Padded Lithotomy Crutches
Padded Arm Rest Board
Padded Shoulder Supports
Padded Side / Lateral Supports
"L" Shaped Anaesthetic Screen
Mattress Set
1 Pair
1 Pc.
1 Set.

Technical Specifications:

: 1900 mm
: 525 mm
: 600 mm Minimum Height; with 150mm to 300 mm Lift
Height Elevation Customizable
: 40° to 50°
: 40° to 50°
: 21°/21°
: 220°/90°
: 90°/90°
: 80°/35°
: $0^{\circ}/90^{\circ}$, Horizontal $0^{\circ}-140^{\circ}$
: 250 mm
: 250 Kgs.

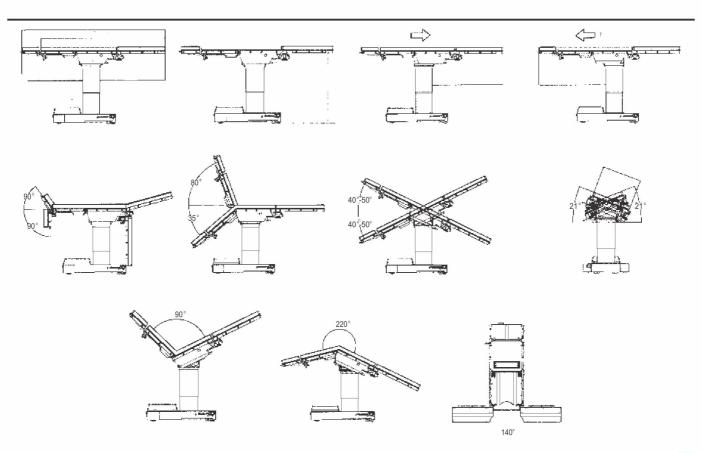





Works: Plot No. 127, IDC, Hisar Road Industrial Area, Rohtak-124001 (HR.) (INDIA)

Mobile No.: +91-9812125829, +91-9896925829
E-mail: aggarwalsurgicalsrtk@gmail.com
Website: www.aggarwalsurgicals.com